

1898 Park Road Benicia CA 94510
707.747.0400 Fax 707.747.9275

Mailbox List pricing includes: Standard 7272 Rubbermaid Mailbox, conduit inside structure, and anchor bolts for installation. Delivery, installation, and lights are not included in price. Call for quote.

16" Mailbox w/ Cap

Size	Model #	Description	Delivery
16"	16C- Cap Type	Stucco Mailbox w/ cap.	2 to 4 wks
16"	16CBB- Cap Type	Stucco Mailbox w/ cap & beauty band.	2 to 4 wks
16"	16CB- Cap Type	Stucco Mailbox w/ cap & base.	2 to 4 wks
16"	16CBBB-CapType	Stucco Mailbox w/ cap, base & beauty band.	2 to 4 wks
16"	16CBBSB-Cap Type	Stucco Mailbox w/ cap, beauty band & stone base.	2 to 4 wks
16"	16CS- Cap Type	Stone Mailbox w/ cap.	2 to 4 wks

20" Mailbox w/ Cap

Size	Model #	Description	Delivery
20"	20C- Cap Type	Stucco Mailbox w/ cap.	2 to 4 wks
20"	20CBB- Cap Type	Stucco Mailbox w/ cap & beauty band.	2 to 4 wks
20"	20CB- Cap Type	Stucco Mailbox w/ cap & base.	2 to 4 wks
20"	20CBBB-CapType	Stucco Mailbox w/ cap, base & beauty band.	2 to 4 wks
20"	20CBBSB-Cap Type	Stucco Mailbox w/ cap, beauty band & stone base.	2 to 4 wks
20"	20CS- Cap Type	Stone Mailbox w/ cap.	2 to 4 wks

24" Mailbox w/ Cap

Size	Model #	Description	Delivery
24"	24C- Cap Type	Stucco Mailbox w/ cap.	2 to 4 wks
24"	24CBB- Cap Type	Stucco Mailbox w/ cap & beauty band.	2 to 4 wks
24"	24CB- Cap Type	Stucco Mailbox w/ cap & base.	2 to 4 wks
24"	24CBBB-CapType	Stucco Mailbox w/ cap, base & beauty band.	2 to 4 wks
24"	24CBBSB-Cap Type	Stucco Mailbox w/ cap, beauty band & stone base.	2 to 4 wks
24"	24CS- Cap Type	Stone Mailbox w/ cap.	2 to 4 wks

30" Mailbox w/ Cap

Size	Model #	Description	Delivery
30"	30C- Cap Type	Stucco Mailbox w/ cap.	2 to 4 wks
30"	30CBB- Cap Type	Stucco Mailbox w/ cap & beauty band.	2 to 4 wks
30"	30CB- Cap Type	Stucco Mailbox w/ cap & base.	2 to 4 wks
30"	30CBBB- Cap Type	Stucco Mailbox w/ cap, base & beauty band.	2 to 4 wks
30"	30CBBSB-Cap Type	Stucco Mailbox w/ cap, beauty band & stone base.	2 to 4 wks
30"	30CSB- Cap Type	Stone Mailbox w/ cap.	2 to 4 wks

Note- Cap Types are types 1-6 found at www.ColumnConcepts.com

Additional Mailbox inserts (7272) are \$50.00. Others will install any lights

Northern California Delivery & Installation:

\$250.00 for Single, \$200.00 for 3 to 5 and \$150.00 for 6 or more.



1898 Park Road Benicia CA 94510
707.747.0400 Phone 707.747.9275 Fax

Mailbox Customer Order Form

PO# _____

Name: _____ **Day Phone:** _____

Address: _____ **Evening Phone:** _____

City/State: _____ **Zip:** _____ **Cell Phone:** _____

Please check the appropriate mailbox selection and option boxes below. The diagram provided depicts different choices available. If further help is needed, please call or email Column Concepts. Mailbox includes: Standard 7272 Rubbermaid Mailbox, conduit inside structure, and anchor bolts for installation.

Mailbox Selection

Model No: _____
(write in Model No.)

Stucco Finish

Spray Texture
Lace
Smooth

Color


White
Cream
Grey
Two-Tone
Other: _____

Stone*


River Rock
Ledge Stone
Other: _____

Mailbox Upgrades*

Paper Slot
Black House #'s:
Brass House #'s:
Plinths (3 per cap)
Other*: _____

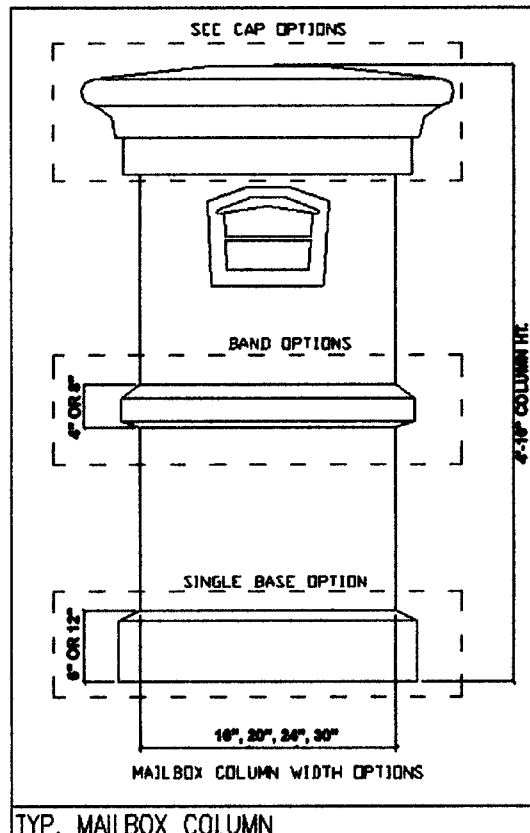

*Upcharge applied to all special orders. Stone and tile finished dimensions will vary depending on unit and tile selection.



COLUMN CONCEPTS

1898 Park Road, Benicia, CA 94510
(707) 747-0400 Fax (707) 747-9275


Recommended Installation

Tools Required

- Socket Set or Crescent Wrench
- Wheel Barrow & Shovel
- Approx. (5) #80 lb. Bags Premixed Concrete
- Level
- Six inches of blocking material

Included

- Column as ordered
- Four anchor bolts

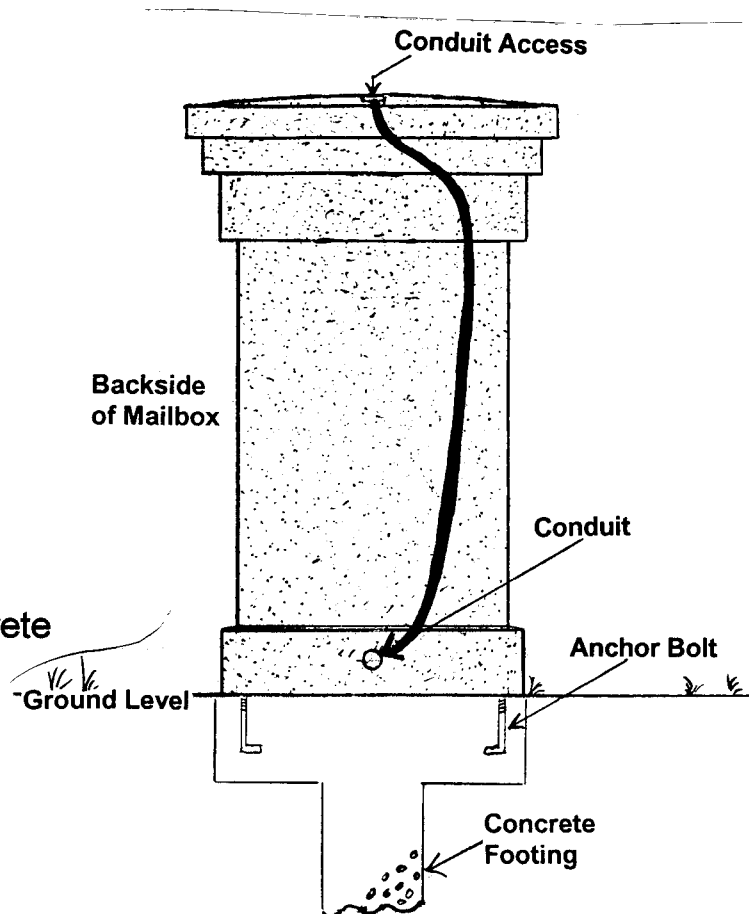

1. Dig footing. (Soils conditions vary, consult your local engineer). Make sure the footing depth in all four corners will accommodate anchor bolts.
2. Place unit approximately three feet from hole facing desired direction.
3. Remove packaging material and four 1/2" bolts (which secure unit to the pallet).
4. Slide column from pallet onto six inch blocking material and hand tighten four 1/2" anchor bolts into bottom of unit. (Make certain before reaching under unit that it is secure on blocking material, or injury may result).
5. Mix concrete and fill footing.
6. Carefully slide unit from blocking onto wet cement, embedding four anchor bolts into cement.
7. Level by pushing down on high side and gently rocking unit from side to side.
8. Electrical conduit (1/2"NMT) is installed in this unit. To access, pound a screw driver into 1 1/2" plastic plug and pry to remove (plug is not visible). Plug locations: First plug is top center of cap, and the second is 2 1/2" up from bottom of the mailbox centered on the back side (opposite from mailbox). Units without mail box will have a black dot to mark electrical access.

Caution: Use proper lifting device. **Injury may occur.**

* Review local postal, city & county codes for proper placement in your area.

** All electrical connections must be installed by a licensed electrician.